

# R&S® ZVH

## Cable and Antenna Analyzer

### Specifications

3 year warranty



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Measurements.....	5
Maximum rated input levels .....	8
Inputs and outputs .....	8
General data.....	9
<b>Options .....</b>	<b>11</b>
Spectrum analysis R&S®ZVH-K1 option .....	11
<i>Frequency</i> .....	11
<i>Sweep time</i> .....	11
<i>Bandwidths</i> .....	11
<i>Level</i> .....	12
<i>Trigger functions</i> .....	13
R&S®ZVH-K42 vector network analysis option/ R&S®ZVH-K45 vector voltmeter option .....	14
R&S®ZVH-K19 channel power meter .....	16
R&S®ZVH-K29 pulse measurements with power sensor .....	16
Equivalence of specifications for different R&S®ZVH part numbers.....	16
<b>Accessories.....</b>	<b>17</b>
R&S®FSH-Z1 and R&S®FSH-Z18 power sensors .....	17
R&S®FSH-Z14 directional power sensor.....	17
R&S®FSH-Z44 directional power sensor.....	19
R&S®HA-Z240 GPS receiver .....	20
<b>Ordering information .....</b>	<b>21</b>
Options.....	21
Accessories.....	21
Power sensors supported by R&S®ZVH-K9 .....	22
Power sensors supported by R&S®ZVH-K29 .....	23

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 15 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

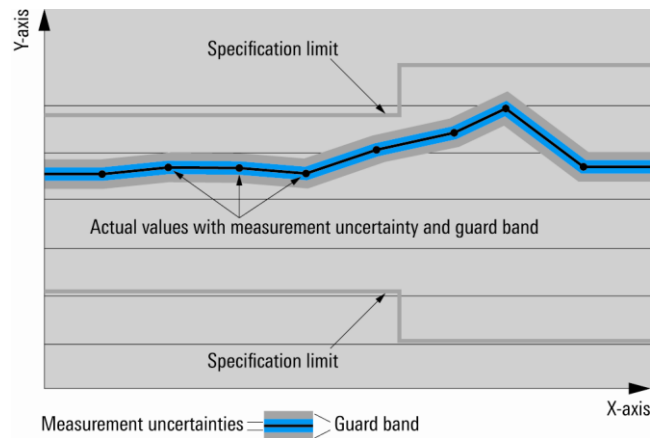

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

## Frequency

Frequency range	R&S®ZVH4	100 kHz to 3.6 GHz
	R&S®ZVH8	100 kHz to 8 GHz
Frequency resolution		1 Hz

<b>Reference frequency, internal</b>		
Total reference accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy}$
Aging per year		$\pm 1 \times 10^{-6}$
Temperature drift	0 °C to +50 °C <sup>1</sup>	$\pm 1 \times 10^{-6}$
Achievable initial calibration accuracy		$\pm 5 \times 10^{-7}$
<b>Reference frequency, with R&amp;S®HA-Z240 GPS receiver option</b>		
Frequency accuracy	GPS on, $\geq 1$ min after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 min after losing satellite lock	$\pm 5 \times 10^{-8}$
<b>Reference frequency, with R&amp;S®FSH-Z114 precision frequency reference option</b>		
Aging per year		$3.6 \times 10^{-9}$
Temperature drift	0 °C to +50 °C	$4 \times 10^{-10}$
Achievable initial calibration accuracy		$1 \times 10^{-9}$
Total reference uncertainty	R&S®FSH-Z114 connected	
	$\geq 30$ s after oscillator lock	$(\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + 3 \times \text{calibration accuracy (nominal)}$
	$\geq 2$ min after oscillator lock	$(\text{time since last adjustment} \times \text{aging rate}) + \text{temperature drift} + \text{calibration accuracy}$

<b>Frequency readout</b>		
Marker resolution		0.1 Hz
Accuracy		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{measurement bandwidth} + \frac{1}{2} ((f_{\text{stop}} - f_{\text{start}}) / (\text{data points} - 1) + 1 \text{ Hz}))$

<sup>1</sup> For serial number < 115000: +30 °C to +50 °C:  $3 \times 10^{-6}$ .

## Measurements

<b>Individual measurements</b>		reflection ( $S_{11}$ , $S_{22}$ )
	with R&S® ZVH-K39 option	transmission ( $S_{21}$ , $S_{12}$ )
		1-port cable loss
		distance-to-fault
<b>Measurement wizard</b>		
Guides the user through a sequence of individual measurements. Uses the R&S®ZVHView PC software to configure the measurement sequence including hints displayed on the screen. R&S®ZVHView is also used to combine the measurement results into user-configurable reports.		

<b>Measurement setup</b>		
Port output power	controlled via tracking generator attenuation	0 dBm to –40 dBm (nom.), in 1 dB steps
Receive path RF attenuation		0 dB to 30 dB in 5 dB steps
Data points	selectable	101, 201, 401, 601, 631, 801, 1001, 1201
Measurement bandwidth	range	100 Hz to 100 kHz in 1/3 sequence
Trace modes		clear/write, average, interference suppression
<b>DC bias</b>		
DC source	selectable	internal or external
Output port	selectable	port 1 or 2
Output voltage	mode: internal	+12 V to +32 V in 1 V steps
Maximum output power	mode: internal	
	operated with battery	4 W
	operated with AC mains	10 W
Maximum continuous output current	mode: internal	500 mA
<b>Trigger</b>		
Trigger source		free run, external rise, external fall
External trigger level		TTL level


<b>Reflection measurement <math>S_{11}</math>, <math>S_{22}</math></b>		
Result formats		magnitude, VSWR
<b>Magnitude</b>		
Range		1/2/5/10/20/50/100/120/150 dB, linear 100 %
Resolution		0.01 dB
<b>VSWR</b>		
Range	selectable	1 to 1.5, 2, 6, 11, 21 or 71
Corrected directivity	100 kHz $\leq f \leq$ 3 GHz	> 43 dB (nom.)
	3 GHz < f $\leq$ 6 GHz	> 37 dB (nom.)
	6 GHz < f $\leq$ 8 GHz	> 31 dB (nom.)
Corrected test port match	100 kHz $\leq f \leq$ 3 GHz	> 40 dB (nom.)
	3 GHz < f $\leq$ 6 GHz	> 37 dB (nom.)
	6 GHz < f $\leq$ 8 GHz	> 30 dB (nom.)
Measurement uncertainty		see figure "Uncertainty of reflection measurement" on page 7

<b>Transmission measurement <math>S_{21}</math>, <math>S_{12}</math> (with R&amp;S®ZVH-K39 option)</b>		
Result format		magnitude
Measurement range		–120 dB to +80 dB
Display range	selectable	1/2/5/10/20/50/100/120/150 dB, linear 100 %
Resolution		0.01 dB
Dynamic range	RF attenuation = 5 dB, tracking generator level = –10 dBm, RBW = 1 kHz	
	100 kHz $\leq f <$ 300 kHz	> 50 dB (nom.)
	300 kHz $\leq f <$ 2.5 GHz	> 80 dB, 100 dB (typ.)
	2.5 GHz $\leq f <$ 6 GHz	> 70 dB, 90 dB (typ.)
6 GHz $\leq f <$ 8 GHz	> 50 dB (nom.)	
Test port match		as specified for test port input/output
Measurement uncertainty	calibration method = full two port high accuracy	see figure "Transmission magnitude uncertainty" on page 7


<b>1-port cable loss measurement</b>		
Result format		magnitude
Range	selectable	1/2/5/10/20/50/100/120/150 dB
Resolution		0.01 dB

<b>Distance-to-fault analysis</b>		
Result formats		return loss, VSWR (average and maximum indication)
Return loss		
Range		1/2/5/10/20/50/100/120/150 dB, linear 100 %
Resolution		0.01 dB
VSWR		
Range	selectable	1 to 1.5, 2, 6, 11, 21 or 71
Fault resolution in meters		$(1.5 \times 10^8 \times \text{velocity factor}/\text{span})$
Maximum cable length	depending on cable loss	1500 m (nom.)

<b>Immunity to interference</b>		
Maximum permissible spurious signal	measurement = reflection ( $S_{11}$ )/1-port cable loss/distance-to-fault analysis	
	RF attenuation = 5 dB	+10 dBm (nom.)
	RF attenuation = 30 dB	+17 dBm (nom.)

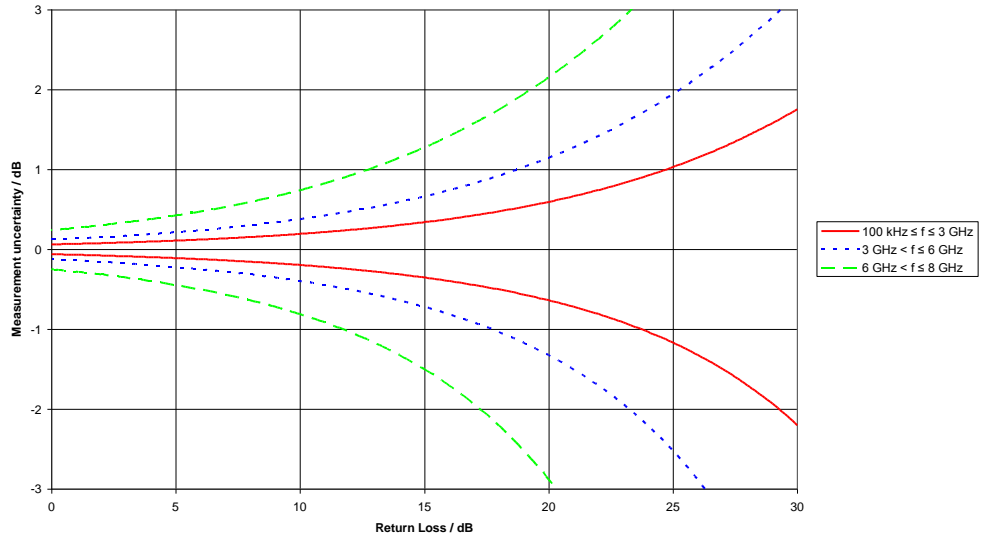

Uncertainty of reflection measurement.

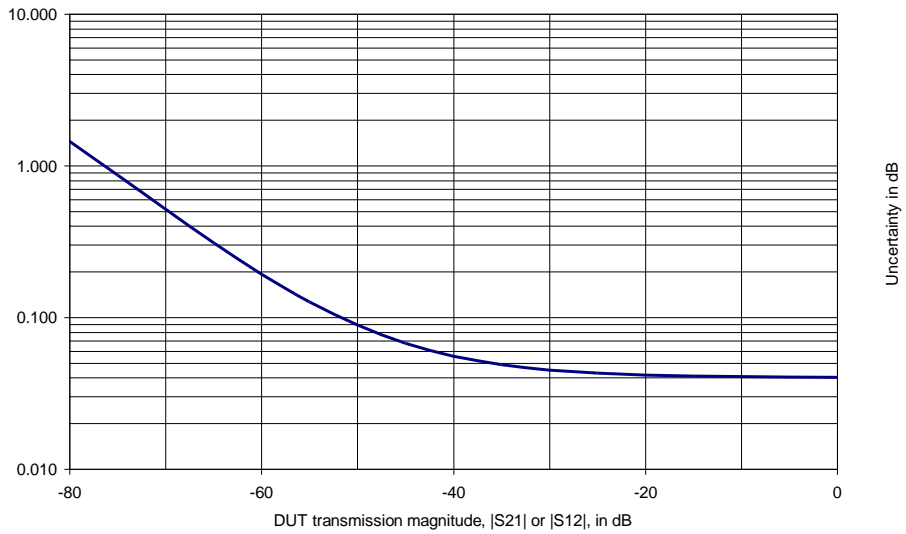

Transmission magnitude uncertainty  
with calibration method "Full Two Port High Accuracy",  $f = 1 \text{ GHz}$ , IF bandwidth = 100 Hz.

## Maximum rated input levels

<b>Maximum rated input level with RF attenuation <math>\geq 10</math> dB</b>		
DC voltage		50 V
CW RF power		30 dBm (= 1 W)
Peak RF power	< 3 s duration	33 dBm (= 2 W)
Max. pulse voltage		150 V
Max. pulse energy	pulse width 10 $\mu$ s	10 mWs

<b>Maximum rated input level with RF attenuation &lt; 10 dB</b>		
DC voltage		50 V
CW RF power		20 dBm (= 100 mW)
Peak RF power	< 3 s duration	23 dBm (= 200 mW)
Max. pulse voltage		50 V
Max. pulse energy	pulse width 10 $\mu$ s	1 mWs

<b>Maximum rated input level, external DC bias</b>		
DC voltage		50 V
Input current		600 mA
Connector type		BNC

## Inputs and outputs

<b>Test port input</b>		
Impedance		50 $\Omega$
Connector		N female
VSWR	100 kHz $\leq f \leq$ 300 kHz	< 2 (nom.)
	300 kHz $\leq f \leq$ 1 GHz	< 1.5 (nom.)
	1 GHz < f $\leq$ 6 GHz	< 2 (nom.)
	6 GHz < f $\leq$ 8 GHz	< 3 (nom.)
Input attenuator	receive path	0 dB to 40 dB in 5 dB steps
<b>Power sensor</b>		
Connector		7-contact female (type Binder 712) or USB type A
Power sensors supported		see "Accessories"
<b>Test port output</b>		
Frequency range	R&S®ZVH4	100 kHz to 3.6 GHz
	R&S®ZVH8	100 kHz to 8 GHz
Connector		N female, 50 $\Omega$
VSWR	100 kHz $\leq f \leq$ 300 kHz	< 2 (nom.)
	300 kHz $\leq f \leq$ 1 GHz	< 1.5 (nom.)
	1 GHz < f $\leq$ 6 GHz	< 2 (nom.)
	6 GHz < f $\leq$ 8 GHz	< 3 (nom.)
Output level		0 dBm to -40 dBm in 1 dB steps
Reverse power	maximum rated levels	
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 $\mu$ s)		1 mWs
<b>External reference, external trigger, external DC bias port 2 (BNC 1)</b>		
Connector		BNC, 50 $\Omega$
Mode	selectable	external reference, external trigger, DC bias port 2
External reference	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low $\rightarrow$ high transition	2.4 V (nom.)
	high $\rightarrow$ low transition	0.7 V (nom.)
External DC bias port 2	max. rated input voltage	50 V
	max. rated input current	600 mA
<b>IF out, external DC bias port 1 (BNC 2)</b>		
Connector		BNC, 50 $\Omega$
Mode	selectable	IF out, DC bias port 1
IF out frequency		54.4 MHz (nom.)
External DC bias port 1	max. rated input voltage	50 V
	max. rated input current	600 mA
<b>AUX</b>		
Connector		7-contact female (type Binder 712)



## General data

<b>Manual operation</b>		
Languages		English, French, German, Italian, Hungarian, Chinese, Japanese, Korean, Portuguese, Russian, Spanish
<b>Remote control (R&amp;S®ZVH-K40 option)</b>		
Command set		SCPI 1997.0
LAN interface		10/100BASE-T, RJ-45
USB		mini B plug, version 1.1
<b>Display</b>		
Resolution		640 × 480 pixel
<b>Audio</b>		
Speaker		internal
<b>USB interface</b>		type A plug, version 1.1
<b>Mass memory</b>		flash memory (internal), SD card (not supplied), size ≤ 32 Gbyte memory stick (not supplied), USB version 1.1 or 2.0
Data storage	internal	> 256 instrument settings and traces
	on SD card/memory stick, ≥ 1 Gbyte	> 5000 instrument settings and traces
<b>Temperature</b>	operating temperature range	-10 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
	battery charging mode	0 °C to +40 °C
<b>Climatic loading</b>	relative humidity	+25 °C/+40 °C at 85 % relative humidity, in line with EN 60068-2-30
	class of protection	IP51
	with R&S®HA-Z222 carrying holster and rain cap	IP54
<b>Mechanical resistance</b>		
Vibration	sinusoidal	in line with EN 60068-2-6, MIL-PRF-28800F class 2
	random	in line with EN 60068-2-64, MIL-PRF-28800F class 2
Shock		40 g shock spectrum, in line with MIL-STD-810F, method 516.4 procedure 1, EN 60068-2-27, MIL-PRF-28800F class 2
<b>Power supply</b>		
R&S®HA-Z201 plug-in AC power supply	AC input voltage range	100 V to 240 V, ±10 % (nom.)
	AC supply frequency	50 Hz to 60 Hz
	max. input current	700 mA
	output specifications	15 V DC (nom.), 2 A (nom.)
	operating temperature range	0 °C to +40 °C
	storage temperature range	-40 °C to +70 °C
	test mark	VDE or SIQ, CE, UL, PSE
External DC voltage		14 V to 16 V
<b>Internal battery</b>		
Capacity	R&S®HA-Z204 (standard)	4.5 Ah (nom.)
	R&S®HA-Z206 (option)	6.75 Ah (nom.)
Voltage		7.2 V (nom.)
Operating time with new, fully charged battery	R&S®HA-Z204 (standard)	3 h (nom.)
	R&S®HA-Z206 (option)	4.5 h (nom.)
Charging time	instrument switched off or R&S®HA-Z203 battery charger	
	R&S®HA-Z204 (standard)	2.5 h (nom.)
	R&S®HA-Z206 (option)	3.5 h (nom.)
	instrument switched on	
	R&S®HA-Z204 (standard)	3.5 h (nom.)
	R&S®HA-Z206 (option)	4.5 h (nom.)
Life time	charging cycles	> 500 (nom.)

<b>Power consumption</b>		12 W (nom.)
<b>Safety</b>		IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010.1-04
<b>EMC</b>		in line with European EMC Directive 2004/108/EC including
		EN 61326 class B (emission)
		CISPR 11/EN 55011/group 1 class B (emission)
<b>Dimensions (W x H x D)</b>	with handle	194 mm x 300 mm x 144 mm (7.6 in x 11.8 in x 5.7 in)
	without handle	194 mm x 300 mm x 69 mm (7.6 in x 11.8 in x 2.7 in)
<b>Weight</b>		< 3 kg (6.6 lb)
<b>Recommended calibration interval</b>		1 year

# Options

## Spectrum analysis R&S®ZVH-K1 option

### Frequency

Frequency range	R&S®ZVH4	100 kHz to 3.6 GHz
	R&S®ZVH8	100 kHz to 8 GHz

Frequency readout		
Marker resolution		0.1 Hz
Accuracy		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1) + 1 \text{ Hz}))$
Number of sweep (trace) points		631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Count accuracy	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$
Frequency span		0 Hz, 10 Hz to 3.6/8 GHz
Max. span deviation		$\pm 1 \%$

Spectral purity SSB phase noise		
Carrier offset		f = 500 MHz
	30 kHz	< -95 dBc (1 Hz), -105 dBc (1 Hz) (typ.)
	100 kHz	< -100 dBc (1 Hz), -110 dBc (1 Hz) (typ.)
	1 MHz	< -120 dBc (1 Hz), -127 dBc (1 Hz) (typ.)

### Sweep time

Sweep time	span = 0 Hz	100 $\mu$ s to 1000 s
	10 Hz $\leq$ span $\leq$ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms $\times$ span/600 MHz to 1000 s
Accuracy	span = 0 Hz	$\pm 1 \%$
	span $\geq$ 10 Hz	$\pm 3 \%$

### Bandwidths

Resolution bandwidths		
Range	-3 dB bandwidth	1 Hz to 3 MHz in 1/3 sequence
Bandwidth uncertainty	1 Hz $\leq$ RBW $\leq$ 300 kHz	< 5 % (nom.)
	RBW > 300 kHz	< 10 % (nom.)
Selectivity 60 dB:3 dB		< 5 (Gaussian type filters) (nom.)
Video filters		
	-3 dB bandwidth	1 Hz to 3 MHz in 1/3 sequence

**Level**

Display range		displayed noise floor to +30 dBm
Maximum rated input level		see chapter "Specifications of the R&S®ZVH cable and antenna analyzer"
<b>Intermodulation</b>		
Third-order intercept (TOI)	intermodulation-free dynamic range, signal level $2 \times -20$ dBm, RF attenuation = 0 dB, RF preamplifier = off	
	$f_{in} < 300$ MHz	> 54 dBc (TOI > +7 dBm) (nom.)
	$300 \text{ MHz} \leq f_{in} < 3.6$ GHz	> 60 dBc (TOI > +10 dBm) (nom.)
	$3.6 \text{ GHz} \leq f_{in} \leq 8$ GHz	> 46 dBc (TOI > +3 dBm) (nom.)
	intermodulation-free dynamic range, signal level $2 \times -40$ dBm, RF attenuation = 0 dB, RF preamplifier = on	
	$f_{in} < 300$ MHz	> 50 dBc (TOI > -15 dBm), (nom.)
Second harmonic intercept (SHI)	RF attenuation = 0 dB, RF preamplifier = off	
	$f_{in} = 20$ MHz to 1.5 GHz	+40 dBm (nom.)
	$f_{in} = 1.5$ GHz to 3 GHz	+30 dBm (nom.)
	$f_{in} = 3$ GHz to 4 GHz	+20 dBm (nom.)
	RF attenuation 0 dB, RF preamplifier = on	
	$f_{in} = 100$ MHz to 4 GHz	0 dBm (nom.)
Displayed average noise level	0 dB RF attenuation, termination 50 $\Omega$ , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator off, normalized to 1 Hz	
	frequency	preamplifier = off
	100 kHz to 1 MHz	< -115 dBm, -125 dBm (typ.)
	1 MHz to 10 MHz	< -136 dBm, -144 dBm (typ.)
	10 MHz to 2 GHz	< -141 dBm, -146 dBm (typ.)
	2 GHz to 3.6 GHz	< -138 dBm, -143 dBm (typ.)
	3.6 GHz to 5 GHz	< -142 dBm, -146 dBm (typ.)
	5 GHz to 6.5 GHz	< -140 dBm, -144 dBm (typ.)
	6.5 GHz to 8 GHz	< -136 dBm, -141 dBm (typ.)
	frequency	preamplifier = on
	100 kHz to 1 MHz	< -133 dBm, -143 dBm (typ.)
	1 MHz to 10 MHz	< -157 dBm, -161 dBm (typ.)
	10 MHz to 1 GHz	< -161 dBm, -165 dBm (typ.)
	1 GHz to 2 GHz	< -159 dBm, -163 dBm (typ.)
	2 GHz to 5 GHz	< -155 dBm, -159 dBm (typ.)
	5 GHz to 6.5 GHz	< -151 dBm, -155 dBm (typ.)
6.5 GHz to 8 GHz	< -147 dBm, -150 dBm (typ.)	

<b>Immunity to interference, nominal values</b>		
Image frequencies	$f_{in} - 2 \times 54.4 \text{ MHz}$	< -70 dBc
	$f_{in} - 2 \times 860.8 \text{ MHz}$	< -70 dBc
	$f_{in} - 2 \times 4892.8 \text{ MHz}$	-60 dBc
Intermediate frequencies	54.4 MHz, 860.8 MHz, 4892.8 MHz	< -60 dBc
	8924.8 MHz	-50 dBc
Other interfering signals, signal level – RF attenuation < -20 dBm	$f \leq 3.6 \text{ GHz}$ , spurious at $f_{in} - 2446.4 \text{ MHz}$	< -60 dBc
	$3.6 \text{ GHz} < f \leq 8 \text{ GHz}$ , spurious at $f_{in} - 4462.4 \text{ MHz}$	< -60 dBc
Other interfering signals, related to local oscillators (f = receive frequency)	$f \leq 3.6 \text{ GHz}$	
	$\Delta f < 300 \text{ kHz}$	-60 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -60 dBc
	$f > 3.6 \text{ GHz}$	
	$\Delta f < 300 \text{ kHz}$	-54 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -54 dBc
Residual spurious response	input matched with 50 $\Omega$ , without input signal, RBW $\leq 30 \text{ kHz}$ , $f \geq 3 \text{ MHz}$ , RF attenuation = 0 dB, tracking generator off	< -90 dBm
<b>Level display</b>		
Logarithmic level axis		1/2/5/10/20/50/100/150 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max. peak, min. peak, auto peak, sample, RMS
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-200 dBm to +30 dBm
Units of level axis		dBm, dBmV, dB $\mu$ V, V, W
<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	$100 \text{ kHz} \leq f < 10 \text{ MHz}$	< 1.5 dB (nom.)
	$10 \text{ MHz} \leq f \leq 3.6 \text{ GHz}$	< 1 dB
	$3.6 \text{ GHz} < f \leq 8 \text{ GHz}$	< 1.5 dB
Attenuator uncertainty		< 0.3 dB
Uncertainty of reference level setting		< 0.1 dB (nom.)
Display nonlinearity	S/N > 16 dB, 0 dB to -50 dB, logarithmic level display	< 0.2 dB
Bandwidth switching uncertainty	reference: RBW = 10 kHz	< 0.1 dB (nom.)
Total measurement uncertainty	95 % confidence level, +20 °C to +30 °C, S/N > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	$10 \text{ MHz} \leq f \leq 3.6 \text{ GHz}$	< 1 dB, 0.5 dB (typ.)
	$3.6 \text{ GHz} < f \leq 8 \text{ GHz}$	< 1.5 dB, 1 dB (typ.)


## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external
External trigger level threshold	low → high transition	2.4 V
	high → low transition	0.7 V
<b>Gated trigger</b>		
Gate source		external
Gate delay		10 $\mu$ s to 100 s, min. resolution 10 $\mu$ s (or 1 % of delay)
Gate length		10 $\mu$ s to 100 s, min. resolution 10 $\mu$ s (or 1 % of gate length)


## R&S®ZVH-K42 vector network analysis option/ R&S®ZVH-K45 vector voltmeter option

Frequency range	R&S®ZVH4	100 kHz to 3.6 GHz
	R&S®ZVH8	100 kHz to 8 GHz
Frequency resolution		1 Hz
Data points	selectable	101, 201, 401, 601, 631, 801, 1001, 1201
Port output power	controlled via tracking generator attenuation	0 dBm to –40 dBm (nom.), in 1 dB steps
Receive path RF attenuation		0 dB to 30 dB in 5 dB steps
Number of traces	split screen	4
Trace modes		clearwrite, average, interference suppression
<b>Reflection measurement</b>		
Result formats	mode: network analyzer	magnitude, phase, VSWR, reflection coefficient, Smith chart, group delay, electrical length
	mode: vector voltmeter	magnitude + phase
Return loss		
Range	selectable	1/2/5/10/20/50/100/120/150 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty		see figure “Uncertainty of reflection measurement” on page 15
One-port phase		
Range	selectable	90/180/360/1000 to 10000° in 1/2/5 steps
Resolution		0.01°
Measurement uncertainty	specifications are based on a matched DUT, bandwidth = 100 Hz, receiver attenuation = 10 dB, nominal source power = –10 dBm, +20 °C to +30 °C	
	100 kHz ≤ f ≤ 3.6 GHz	
	0 dB ≤ return loss < 15 dB	< 3° (nom.)
	15 dB ≤ return loss < 25 dB	< 6° (nom.)
	25 dB ≤ return loss < 35 dB	< 20° (nom.)
	3.6 GHz < f ≤ 8 GHz (R&S®ZVH8 only)	
	0 dB ≤ return loss < 15 dB	< 3° (nom.)
15 dB ≤ return loss < 25 dB	< 6° (nom.)	
25 dB ≤ return loss < 35 dB	< 20° (nom.)	
VSWR		
Range	selectable	1 to 1.1, 1.5, 2, 6, 11, 21 or 71
Smith chart		
Range		1, zoom × 2, × 4, × 8
Reflection coefficient		
mRho	range	1 to 1000 in 1, 2, 5 steps
Corrected directivity	100 kHz ≤ f ≤ 3 GHz	> 43 dB (nom.)
	3 GHz < f ≤ 6 GHz	> 37 dB (nom.)
	6 GHz < f ≤ 8 GHz	> 31 dB (nom.)
Corrected test port match	100 kHz ≤ f ≤ 3 GHz	> 40 dB (nom.)
	3 GHz < f ≤ 6 GHz	> 37 dB (nom.)
	6 GHz < f ≤ 8 GHz	> 30 dB (nom.)
<b>Transmission measurement</b>		
Result formats	mode: network analyzer	magnitude, phase, group delay, electrical length
	mode: vector voltmeter	magnitude + phase
Gain		
Measurement range		–120 dB to +80 dB
Display range	selectable	1/2/5/10/20/50/100/120/150 dB, linear 100 %
Resolution		0.01 dB
Measurement uncertainty	calibration method: full two port high accuracy	see figure “Transmission magnitude uncertainty” on page 15
Phase		
Range	selectable	90/180/360/1000° to 10000° in 1/2/5 steps
Resolution		0.01°

Measurement uncertainty	specifications are based on a matched DUT, bandwidth = 100 Hz, RF attenuation = 10 dB, nominal source power = -10 dBm, +20 °C to +30 °C	
	100 kHz ≤ f ≤ 50 MHz	
	0 dB ≤ insertion loss < 40 dB	< 2° (nom.)
	50 MHz < f ≤ 3.6 GHz	
	0 dB ≤ insertion loss < 50 dB	< 2° (nom.)
	50 dB ≤ insertion loss < 70 dB	< 3° (nom.)
	3.6 GHz < f < 6 GHz (R&S®ZVH8 only)	
	0 dB ≤ insertion loss < 50 dB	< 2° (nom.)
	50 dB ≤ insertion loss < 70 dB	< 3° (nom.)
	6 GHz ≤ f < 8 GHz (R&S®ZVH8 only)	
0 dB ≤ insertion loss < 50 dB	< 3° (nom.)	
50 dB ≤ insertion loss < 70 dB	< 5° (nom.)	
Dynamic range	RF attenuation = 5 dB, tracking generator level = -10 dBm, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	> 50 dB (nom.)
	300 kHz ≤ f < 2.5 GHz	> 80 dB, 100 dB (typ.)
	2.5 GHz ≤ f < 6 GHz	> 70 dB, 90 dB (typ.)
	6 GHz ≤ f < 8 GHz	> 50 dB (nom.)
Test port match	as specified for test port input/output	

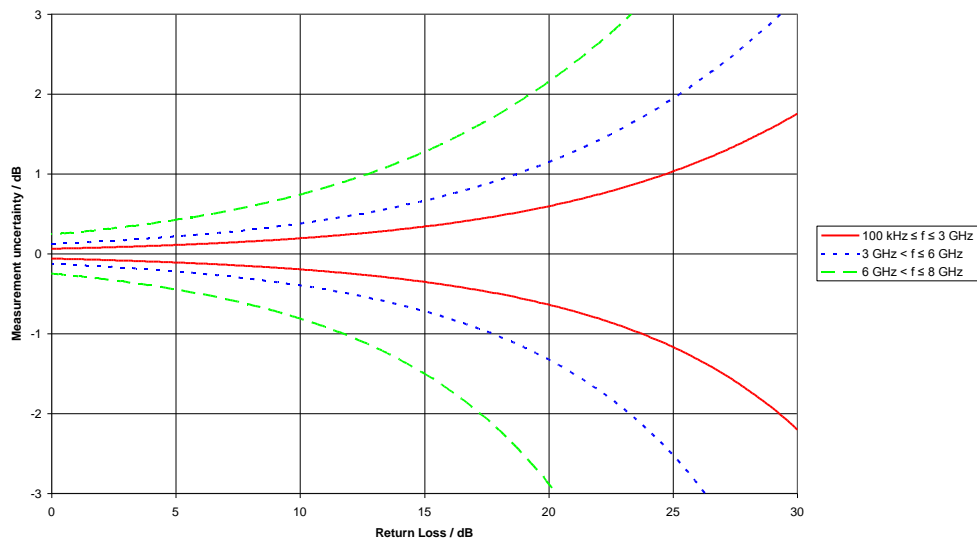

Uncertainty of reflection measurement

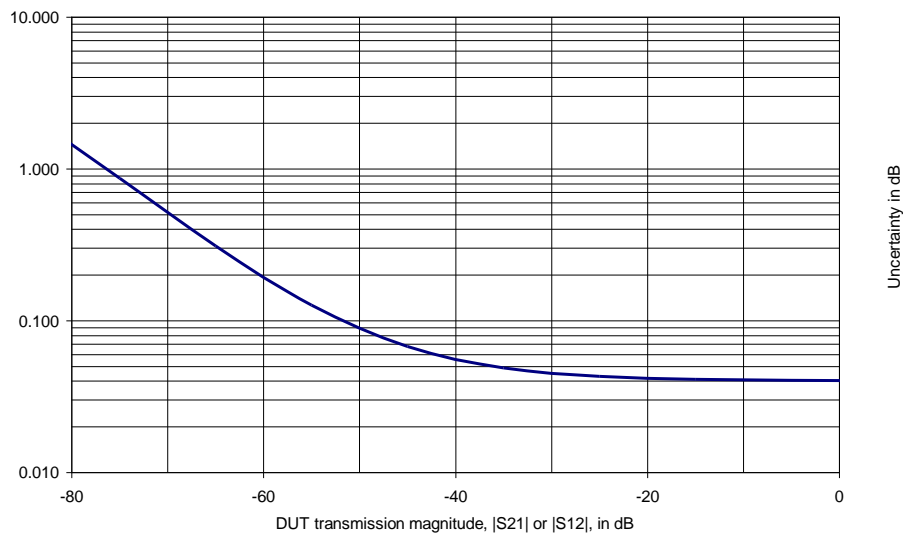

Transmission magnitude uncertainty  
with calibration method "Full Two Port High Accuracy", f = 1 GHz, IF bandwidth = 100 Hz.

## R&S®ZVH-K19 channel power meter

Frequency range	R&S®ZVH4	100 kHz to 3.6 GHz
	R&S®ZVH8	100 kHz to 8 GHz
Channel bandwidth		100 kHz to 1 GHz
Amplitude		offset, dB relative, zeroing
Unit		dBm, W
Limits		on/off, upper limit, lower limit, beep on fail
Measurement range		-120 dBm to +30 dBm
<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	< 0.3 dB
Frequency response (+20 °C to +30 °C)	100 kHz ≤ f < 10 MHz	< 1.5 dB (nom.)
	10 MHz ≤ f ≤ 3.6 GHz	< 1 dB
	3.6 GHz < f ≤ 8 GHz	< 1.5 dB
Measurement port		port 1

## R&S®ZVH-K29 pulse measurements with power sensor

In combination with one of the power sensors R&S®NRP-Z81/-Z85/-Z86, the R&S®ZVH4/8 supports measurements on pulsed signals<sup>2</sup>. The achievable RF performance is documented in the data sheet specifications of the R&S®NRP-Z81/-Z85/-Z86 power sensors. The list below shows which measurements are supported by the R&S®ZVH-K29.

Measurements	R&S®FSH-K29
Pulse power parameters	•
Peak power	•
Pulse top power	•
Average power	•
Base power	•
Minimum power	•
Positive overshoot	•
Negative overshoot	•
Pulse timing parameters	•
Pulse duration	•
Pulse period	•
Pulse start/stop time	•
Rise/fall time	•
Duty cycle	•

## Equivalence of specifications for different R&S®ZVH part numbers

- The specifications for part number 1309.6800.74 are equivalent to part number 1309.6000.24
- The specifications for part number 1309.6800.78 are equivalent to part number 1309.6000.28

<sup>2</sup> The R&S®NRP-Z8x power sensors are supported by instruments with serial number ≥ 105000. The R&S®FSH-Z129 adapter cable is needed in addition for R&S®ZVH4 with serial number < 115340 and for R&S®ZVH8 with serial number < 115240.



## Accessories

### R&S®FSH-Z1 and R&S®FSH-Z18 power sensors

Frequency range	R&S®FSH-Z1	10 MHz to 8 GHz
	R&S®FSH-Z18	10 MHz to 18 GHz
VSWR	10 MHz to 30 MHz	< 1.15
	30 MHz to 2.4 GHz	< 1.13
	2.4 GHz to 8 GHz	< 1.20
	8 GHz to 18 GHz	< 1.25
Maximum input power	average power	400 mW (+26 dBm)
	peak power (< 10 $\mu$ s, 1 % duty cycle)	1 W (+30 dBm)
Measurement range		200 pW to 200 mW (-67 dBm to +23 dBm)
Signal weighting		average power
Effect of harmonics		< 0.5 % (0.02 dB) at harmonic ratio of 20 dB
Effect of modulation		< 1.5 % (0.07 dB) for continuous digital modulation
Absolute measurement uncertainty	sine signals, no zero offset	
10 MHz to 8 GHz	+15 °C to +35 °C	< 2.3 % (0.10 dB)
	0 °C to +50 °C	< 4.2 % (0.18 dB)
8 GHz to 18 GHz	+15 °C to +35 °C	< 3.5 % (0.15 dB)
	0 °C to +50 °C	< 5.0 % (0.21 dB)
Zero offset after zeroing		< 110 pW
Dimensions (W x H x D)		48 mm x 31 mm x 170 mm (1.9 in x 1.2 in x 6.7 in)
	connecting cable	1.5 m (59 in)
Weight		< 0.3 kg (0.7 lb)


### R&S®FSH-Z14 directional power sensor

Frequency range		25 MHz to 1 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 $\Omega$		< 1.06
Power-handling capacity	depending on temperature and matching (see diagram on next page)	100 W to 1000 W
Insertion loss		< 0.06 dB
Directivity		> 30 dB
<b>Average power</b>		
Power measurement range		
CW, FM, PM, FSK, GMSK	CF: ratio of peak envelope power to average power	30 mW to 300 W
Modulated signals		30 mW to 300 W/CF


Measurement uncertainty		
25 MHz to 40 MHz	sine signal	4.0 % of measured value (0.17 dB)
40 MHz to 1 GHz	+18 °C to +28 °C, no zero offset	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	$\pm$ 4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	$\pm$ 3 % of measured value ( $\pm$ 0.13 dB)
	two CW carriers with identical power	$\pm$ 2 % of measured value ( $\pm$ 0.09 dB)
	EDGE, TETRA	$\pm$ 0.5 % of measured value ( $\pm$ 0.02 dB) <sup>3</sup>
Temperature coefficient	25 MHz to 40 MHz	0.40 %/K (0.017 dB/K)
	40 MHz to 1 GHz	0.25 %/K (0.011 dB/K)

<sup>3</sup> If standard is selected on the R&S®ZVH.

<b>Max. peak envelope power</b>		
Power measurement range		
Video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	600 kHz	2 W to 300 W
Measurement uncertainty	same as for average power plus effect of peak hold circuit	+18 °C to +28 °C
Error limits of peak hold circuit for burst signals	duty cycle $\geq 0.1$ and repetition rate $\geq 100/s$	
	video bandwidth 4 kHz	$\pm(3\%$ of measured value + 0.05 W) starting from a burst width of 200 $\mu s$
	video bandwidth 200 kHz	$\pm(3\%$ of measured value + 0.20 W) starting from a burst width of 4 $\mu s$
	video bandwidth 600 kHz	$\pm(7\%$ of measured value + 0.40 W) starting from a burst width of 2 $\mu s$
	20/s $\leq$ repetition rate $< 100/s$ 0.001 $\leq$ duty cycle $< 0.1$	plus $\pm(1.6\%$ of measured value + 0.15 W) plus $\pm 0.10$ W
Temperature coefficient	25 MHz to 40 MHz	0.50 %/K (0.022 dB/K)
	40 MHz to 1 GHz	0.35 %/K (0.015 dB/K)
<b>Load matching</b>		
Matching measurement range		
Return loss		0 dB to 23 dB
VSWR		$> 1.15$
Minimum forward power	specifications complied with $\geq 0.4$ W	0.06 W
Dimensions (W x H x D)		120 mm x 95 mm x 39 mm (4.7 in x 3.7 in x 1.5 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.4 lb)

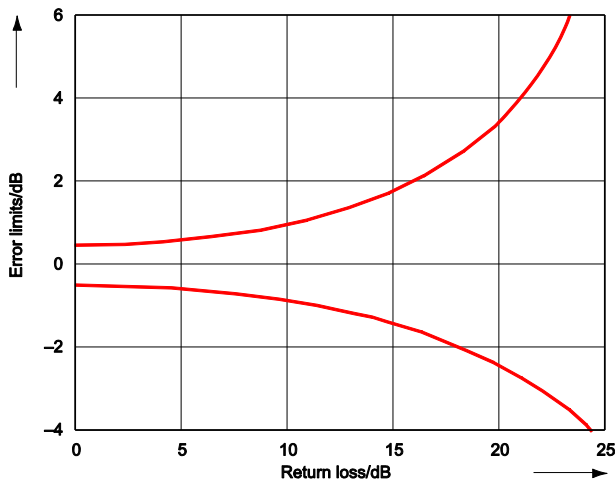

Error limits for matching measurements.

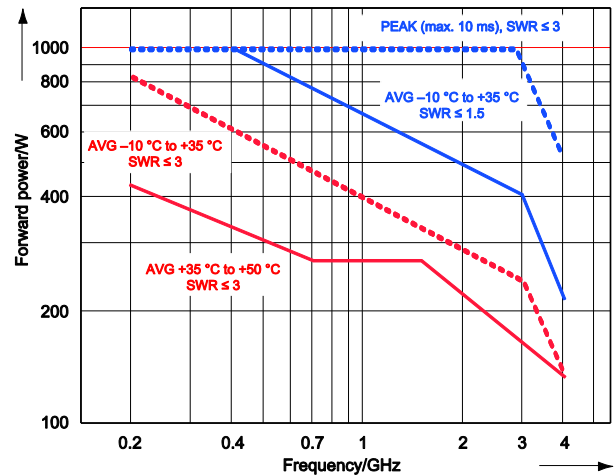


Power-handling capacity.

## R&S®FSH-Z44 directional power sensor


Frequency range		200 MHz to 4 GHz
Power measurement range		30 mW to 300 W
VSWR referenced to 50 Ω	200 MHz to 3 GHz	< 1.07
	3 GHz to 4 GHz	< 1.12
Power-handling capacity	depending on temperature and matching (see diagram on next page)	120 W to 1000 W
Insertion loss	200 MHz to 1.5 GHz	< 0.06 dB
	1.5 GHz to 4 GHz	< 0.09 dB
Directivity	200 MHz to 3 GHz	> 30 dB
	3 GHz to 4 GHz	> 26 dB
<b>Average power</b>		
Power measurement range	CF: ratio of peak envelope power to average power	
	CW, FM, PM, FSK, GMSK	30 mW to 300 W
	LTE, 3GPP WCDMA, cdmaOne, CDMA2000®, DAB, DVB-T	30 mW to 120 W
	other modulated signals	30 mW to 300 W/CF
Measurement uncertainty	sine signal, +18 °C to +28 °C, no zero offset	
	200 MHz to 300 MHz	4.0 % of measured value (0.17 dB)
	300 MHz to 4 GHz	3.2 % of measured value (0.14 dB)
Zero offset	after zeroing	±4 mW
Range of typical measurement error with modulation	FM, PM, FSK, GMSK	0 % of measured value (0 dB)
	AM (80 %)	±3 % of measured value (±0.13 dB)
	two CW carriers with identical power	±2 % of measured value (±0.09 dB)
	π/4-DQPSK	±2 % of measured value (±0.09 dB)
	EDGE	±0.5 % of measured value (±0.02 dB) <sup>4</sup>
	cdmaOne, DAB	±1 % of measured value (±0.04 dB) <sup>4</sup>
	3GPP WCDMA, CDMA2000®	±2 % of measured value (±0.09 dB) <sup>4</sup>
Temperature coefficient	200 MHz to 300 MHz	0.40 %/K (0.017 dB/K)
	300 MHz to 4 GHz	0.25 %/K (0.011 dB/K)
<b>Max. peak envelope power</b>		
Power measurement range		
DAB, DVB-T, cdmaOne, CDMA2000®, 3GPP WCDMA		4 W to 300 W
Other signals at video bandwidth	4 kHz	0.4 W to 300 W
	200 kHz	1 W to 300 W
	4 MHz	2 W to 300 W
Measurement uncertainty	+18 °C to +28 °C	same as for average power plus effect of peak hold circuit
Error limits of peak hold circuit for burst signals	duty cycle ≥ 0.1 and repetition rate ≥ 100/s	
	video bandwidth 4 kHz	±(3 % of measured value + 0.05 W) starting from a burst width of 100 μs
	video bandwidth 200 kHz	±(3 % of measured value + 0.20 W) starting from a burst width of 4 μs
	video bandwidth 4 MHz	±(7 % of measured value + 0.40 W) starting from a burst width of 1 μs
	20/s ≤ repetition rate < 100/s	plus ±(1.6 % of measured value + 0.15 W)
	0.001 ≤ duty cycle < 0.1	plus ±0.10 W
	burst width ≥ 0.5 μs	plus ±5 % of measured value
burst width ≥ 0.2 μs	plus ±10 % of measured value	
Range of typical measurement error of peak hold circuit	video bandwidth 4 MHz and standard selected on the R&S®FSH	
	cdmaOne, DAB	±(5 % of measured value + 0.4 W)
	DVB-T, CDMA2000®, 3GPP WCDMA	±(15 % of measured value + 0.4 W)
Temperature coefficient	200 MHz to 300 MHz	0.50 %/K (0.022 dB/K)
	300 MHz to 4 GHz	0.35 %/K (0.015 dB/K)

<sup>4</sup> If standard is selected on the R&S®ZVH.

Load matching		
Matching measurement range		
Return loss	200 MHz to 3 GHz	0 dB to +23 dB
VSWR	3 GHz to 4 GHz	0 dB to +20 dB
VSWR	200 MHz to 3 GHz	> 1.15
	3 GHz to 4 GHz	> 1.22
Minimum forward power	specifications complied with $\geq 0.2$ W	0.03 W
Dimensions (W x H x D)		120 mm x 95 mm x 39 mm (4.7 in x 3.7 in x 1.5 in)
	connecting cable	1.5 m (59 in)
Weight		0.65 kg (1.4 lb)

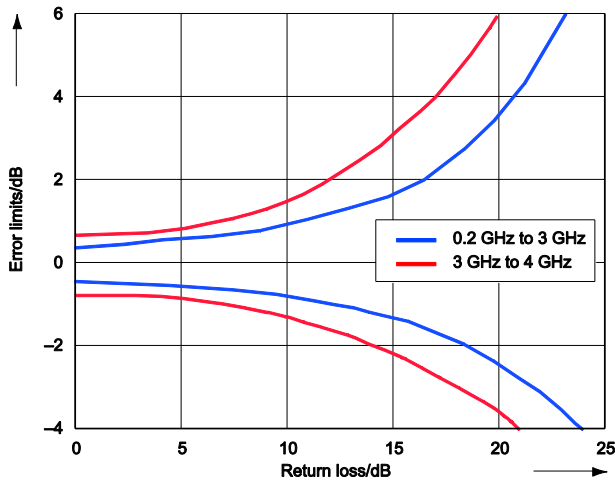

Error limits for matching measurements.

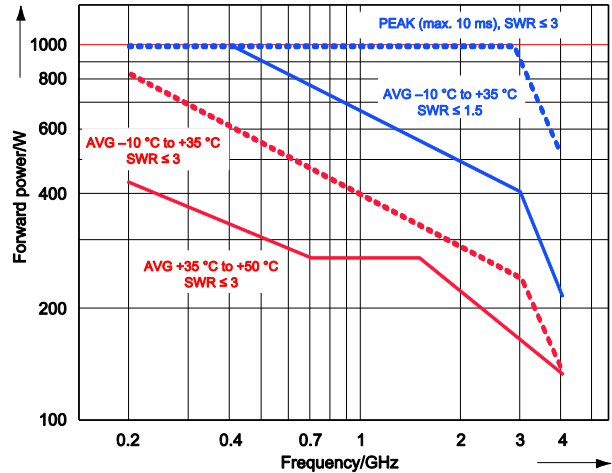

Power-handling capacity.

## R&S® HA-Z240 GPS receiver

GPS location indication		latitude, longitude
Reference frequency uncertainty	GPS on, $\geq 1$ minute after satellite lock	$\pm 2.5 \times 10^{-8}$
	up to 30 minutes after losing satellite lock	$\pm 5 \times 10^{-8}$
Temperature	operating temperature range	-20 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading	GPS receiver module	IEC 60529 IPX7 level
Connector		7-contact male (type Binder 712)
Power consumption		0.45 W (nom.)
Test marks		FCC, CE
Dimensions	$\varnothing \times H$	61 mm x 19.5 mm (2.4 in x 0.8 in)
	cable length	5 m (16.4 ft)
Weight		200 g (0.4 lb)

## Ordering information

Designation	Type	Order No.
Cable and Antenna Analyzer, 100 kHz to 3.6 GHz	R&S®ZVH4	1309.6800.24
Cable and Antenna Analyzer, 100 kHz to 8 GHz	R&S®ZVH8	1309.6800.28
<b>Accessories supplied</b>		
Lithium-Ion battery pack, USB cable, LAN cable, AC power supply, CD-ROM with R&S®FSH4View software and documentation, quick start guide, SD card reader for PC		

## Options

Designation	Type	Order No.
Spectrum Analysis	R&S®ZVH-K1	1309.6823.02
Power Meter	R&S®ZVH-K9	1309.6852.02
Spectrogram Measurement Application	R&S®ZVH-K14	1309.7007.02
Channel Power Meter	R&S®ZVH-K19	1304.5987.02
Pulse Measurements with Power Sensor <sup>5</sup>	R&S®ZVH-K29	1304.0491.02
Transmission Measurement for Cable and Antenna Mode	R&S®ZVH-K39	1309.6830.02
Remote Control via LAN or USB	R&S®ZVH-K40	1309.7013.02
Vector Network Analysis	R&S®ZVH-K42	1309.6846.02
Vector Voltmeter	R&S®ZVH-K45	1309.6998.02

## Accessories

Designation	Type	Order No.
RF Cable (length: 1 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z320	1309.6600.00
RF Cable (length: 3 m), DC to 8 GHz, armored, N male/N female connectors	R&S®FSH-Z321	1309.6617.00
Precision Frequency Reference	R&S®FSH-Z114	1304.5935.02
Combined Open/Short/50 Ω Load Calibration Standard, DC to 3.6 GHz, N male	R&S®FSH-Z29	1300.7510.03
Combined Open/Short/50 Ω Load Calibration Standard, DC to 8 GHz, N male	R&S®FSH-Z28	1300.7810.03
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 9 GHz, N male	R&S®ZV-Z170	1317.7683.02
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 9 GHz, N female	R&S®ZV-Z170	1317.7683.03
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 15 GHz, 3.5 mm male	R&S®ZV-Z135	1317.7677.02
Combined Open/Short/50 Ω Load/Through Calibration Standard, DC to 15 GHz, 3.5 mm female	R&S®ZV-Z135	1317.7677.03
Matching Pad 50/75 Ω, L section	R&S®RAM	0358.5414.02
Matching Pad 50/75 Ω, series resistor 25 Ω	R&S®RAZ	0358.5714.02
Matching Pad 50/75 Ω, L section, N to BNC	R&S®FSH-Z38	1300.7740.02
Adapter N (m) – BNC (f)		0118.2812.00
Adapter N (m) – N (m)		0092.6581.00
Adapter N (m) – SMA (f)		4012.5837.00
Adapter N (m) – 7/16 (f)		3530.6646.00
Adapter N (m) – 7/16 (m)		3530.6630.00
Adapter N (m) – FME (f)		4048.9790.00
Adapter BNC (m) – Banana (f)		0017.6742.00
Attenuator 50 W, 20 dB, 50 Ω, DC to 6 GHz, N(f) – N(m)	R&S®RDL50	1035.1700.52
Attenuator 100 W, 20 dB, 50 Ω, DC to 2 GHz, N(f) – N(m)	R&S®RBU100	1073.8495.20
Attenuator 100 W, 30 dB, 50 Ω, DC to 2 GHz, N(f) – N(m)	R&S®RBU100	1073.8495.30
12 V Car Adapter <sup>6</sup>	R&S®HA-Z202	1309.6117.00
Lithium-Ion Battery Pack, 4.5 Ah	R&S®HA-Z204	1309.6130.00
Lithium-Ion Battery Pack, 6.75 Ah	R&S®HA-Z206	1309.6146.00
Battery Charger for Lithium-Ion battery packs R&S®HA-Z204 and R&S®HA-Z206 <sup>7</sup>	R&S®HA-Z203	1309.6123.00
Soft Carrying Bag	R&S®HA-Z220	1309.6175.00

<sup>5</sup> Requires a power sensor R&S®NRP-Z81/-Z85/-Z86. Wideband power sensors require the adapter cable R&S®FSH-Z129 for R&S®ZVH4 with serial number < 115340 and for R&S®ZVH8 with serial number < 115240. Otherwise R&S®NRP-Z4 is suitable.

<sup>6</sup> The car adapter is suitable for both the instrument and the R&S®HA-Z203 battery charger.

<sup>7</sup> The battery charger is used for charging an additional battery outside the instrument. The internal battery is charged by the instrument itself.

Designation	Type	Order No.
Hard Case	R&S®HA-Z221	1309.6181.00
Carrying Holster, including chest harness and rain cover	R&S®HA-Z222	1309.6198.00
SD Memory Card, 4 Gbyte <sup>8</sup>	R&S®HA-Z232	1309.6223.00
Headphones	R&S®FSH-Z36	1145.5838.02
GSM/UMTS/CDMA antenna magnetic mount 850/900/1800/1900/2100 band, N connector	R&S®TS95A16	1118.6943.16
Active Directional Antenna, 20 MHz to 7.5 GHz	R&S®HE300	4067.5900.02
Loop Antenna for R&S®HE300, 9 kHz to 20 MHz	R&S®HE300HF	4067.6806.02
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02
Spare USB Cable	R&S®HA-Z211	1309.6169.00
Spare Ethernet Cable	R&S®HA-Z210	1309.6152.00
Spare AC Power Supply, incl. mains plug for EU, GB, US	R&S®HA-Z201	1309.6100.00
Power cord + adapter for R&S®HA-Z201 Spare AC power supply (changes the power supply to laptop style)		
Power Cord EU	R&S®HA-Z209	1309.7465.02
Power Cord GB	R&S®HA-Z209	1309.7465.03
Power Cord US/JP	R&S®HA-Z209	1309.7465.04
Power Cord AUS	R&S®HA-Z209	1309.7465.05
GPS Receiver	R&S®HA-Z240	1309.6700.03
Spare CD-ROM including R&S®ZVHView software and operating manual for R&S®ZVH4/ZVH8	R&S®ZVH-Z45	1309.6946.00
Spare Printed Quick Start Guide, for R&S®ZVH4/ZVH8, English	R&S®ZVH-Z46	1309.6900.12
Spare Printed Quick Start Guide, for R&S®ZVH4/ZVH8, German	R&S®ZVH-Z47	1309.6900.11

## Power sensors supported by R&S®ZVH-K9<sup>9</sup>

Designation	Type	Order No.
Power Sensor, 10 MHz to 8 GHz	R&S®FSH-Z1	1155.4505.02
Power Sensor, 10 MHz to 18 GHz	R&S®FSH-Z18	1165.1909.02
Directional Power Sensor, 25 MHz to 1 GHz	R&S®FSH-Z14	1120.6001.02
Directional Power Sensor, 200 MHz to 4 GHz	R&S®FSH-Z44	1165.2305.02
Universal Power Sensor, 10 MHz to 8 GHz, 100 mW, 2-path	R&S®NRP-Z211	1417.0409.02
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 100 mW, 2-path	R&S®NRP-Z221	1417.0309.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor, 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Universal Power Sensor, 10 MHz to 33 GHz, 200 mW	R&S®NRP-Z31	1169.2400.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02

<sup>8</sup> Firmware update is installed from SD memory card.

<sup>9</sup> For average power measurements only.

## Power sensors supported by R&S®ZVH-K29 <sup>10</sup>

Designation	Type	Order No.
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Wideband Power Sensor, 50 MHz to 40 GHz, 100 mW, 2.92 mm connector	R&S®NRP-Z85	1411.7501.02
Wideband Power Sensor, 50 MHz to 40 GHz, 100 mW, 2.4 mm connector	R&S®NRP-Z86	1417.0109.40
Wideband Power Sensor, 50 MHz to 44 GHz, 100 mW, 2.4 mm connector	R&S®NRP-Z86	1417.0109.44
R&S®NRP-Zxx power sensors require the following adapter cable for operation on the R&S®ZVH		
Passive USB Adapter to connect R&S®NRP sensors to the R&S®ZVH	R&S®NRP-Z4	1146.8001.02
R&S®FSH-Zxx power sensors require the following adapter cable for connection to a PC		
USB Adapter Cable, for R&S®FSH-Z1/R&S®FSH-Z18	R&S®FSH-Z101	1164.6242.02
USB Adapter Cable, for R&S®FSH-Z14/R&S®FSH-Z44	R&S®FSH-Z144	1145.5909.02

Warranty		
Base unit		3 years
All other items		1 year
Options		
Extended Warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended Warranty, two years	R&S®WE2	
Extended Warranty with Calibration Coverage, one year	R&S®CW1	
Extended Warranty with Calibration Coverage, two years	R&S®CW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>11</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>11</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

For product brochure, see PD 5214.4588.12 and [www.rohde-schwarz.com](http://www.rohde-schwarz.com)

<sup>10</sup> Requires a power sensor R&S®NRP-Z81/-Z85/-Z86. Wideband power sensors requires the adapter cable R&S®FSH-Z129 for instruments with serial number < 115340 for R&S®ZVH4, serial number <115240 for R&S®ZVH8. Otherwise R&S®NRP-Z4 is suitable.

<sup>11</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, radiomonitoring and radiolocation. Founded more than 80 years ago, this independent company has an extensive sales and service network and is present in more than 70 countries. The electronics group is among the world market leaders in its established business fields. The company is headquartered in Munich, Germany. It also has regional headquarters in Singapore and Columbia, Maryland, USA, to manage its operations in these regions.

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 5214.4588.22 | Version 07.00 | June 2016 (as)

R&S®ZVH Cable and Antenna Analyzer

Data without tolerance limits is not binding | Subject to change

© 2010 - 2016 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5214458822